


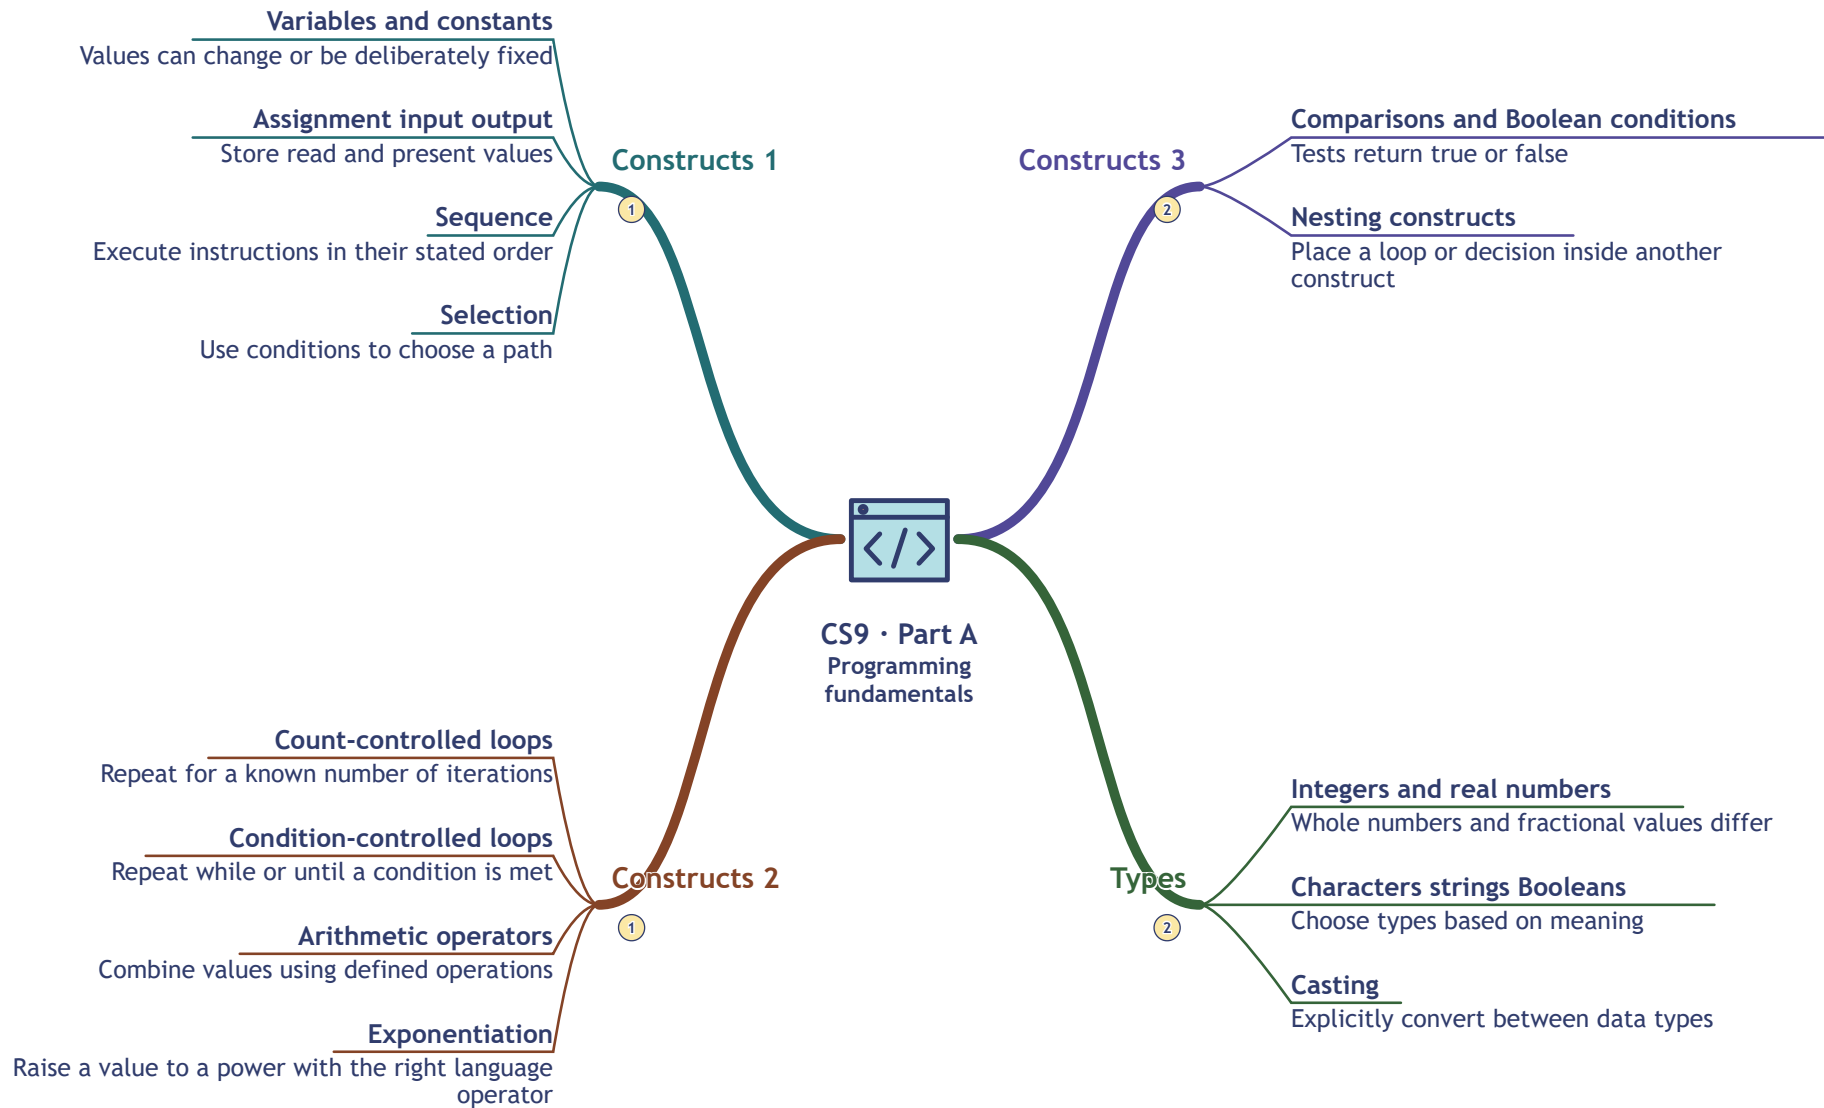

1. Constructs 1 → Constructs 2: Assigned values and decisions control which repeated operations run.
2. Constructs 3 → Types: Operators and nested constructs must use compatible data types.